



背部印刷/Belt Printing

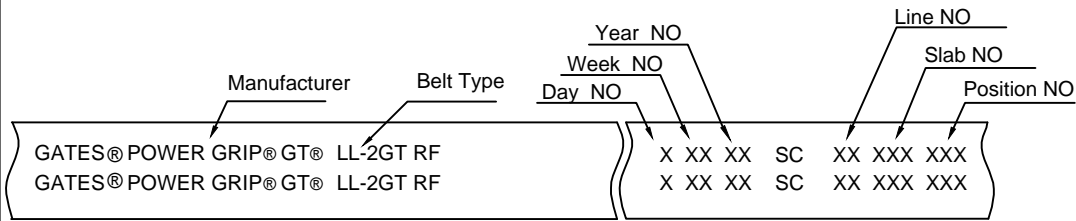

齿形尺寸/Tooth Dimension

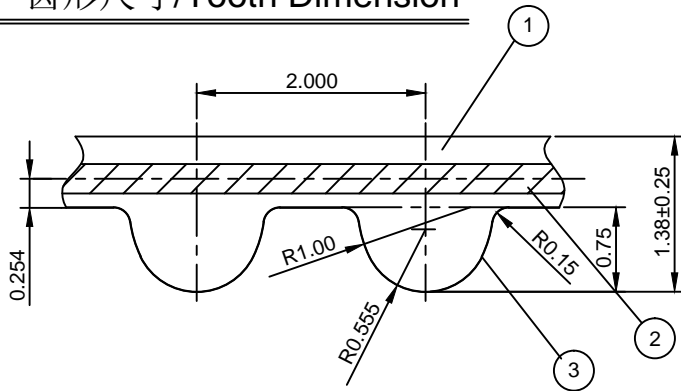

③	Fabric Cover	Nylon Jacket
②	Tension Member	Glass Fiber Cord
①	Compound	ChloropreneRubber
Part No.	Part Name	Material

皮带参数/Belt Spec.

皮带型号 Belt Size	LL-2GT RF
带宽 (mm) Belt Width	6.00±0.60
	9.00±0.60
	10.00±0.60
	12.00±0.80
15.00±0.80	
节距 (mm) Tooth Pitch	2.00
皮带厚度(mm) Belt Thickness	1.38±0.25

注意事项/Note

- (1). The belt is prohibited from conveying food directly
- (2). Do not put oil, water or other chemicals on the belt, such lubricants are not necessary and will shorten belt life
- (3). Do not bend. The belt as this way damage the tension member, no tools or force should be applied to the belt during installation
- (4). Do not conserve the belt on the outdoor, high temperature, high humidity and wicked condition

01	2018/04/24	N/A	Release			YC	ZN	SL
Version	Date	Location	Modification Reason and Content			ED	CH	AP
Customer Name		锐力斯				Customer Confirmation		
Customer Part NO.	Project Name	Belt Type	Belt Name	GUPT Drawing NO	CH.	/		
/	/	2GT	LL-2GT RF	TDR-3710	AP.	/		

DATE	EDIT	CHECK	REVIEW	APPROVED
------	------	-------	--------	----------



Gates Unitta Power Transmission(SuZhou)Co.,Ltd.